




PSYLO RACE

2001 OWNER'S MANUAL

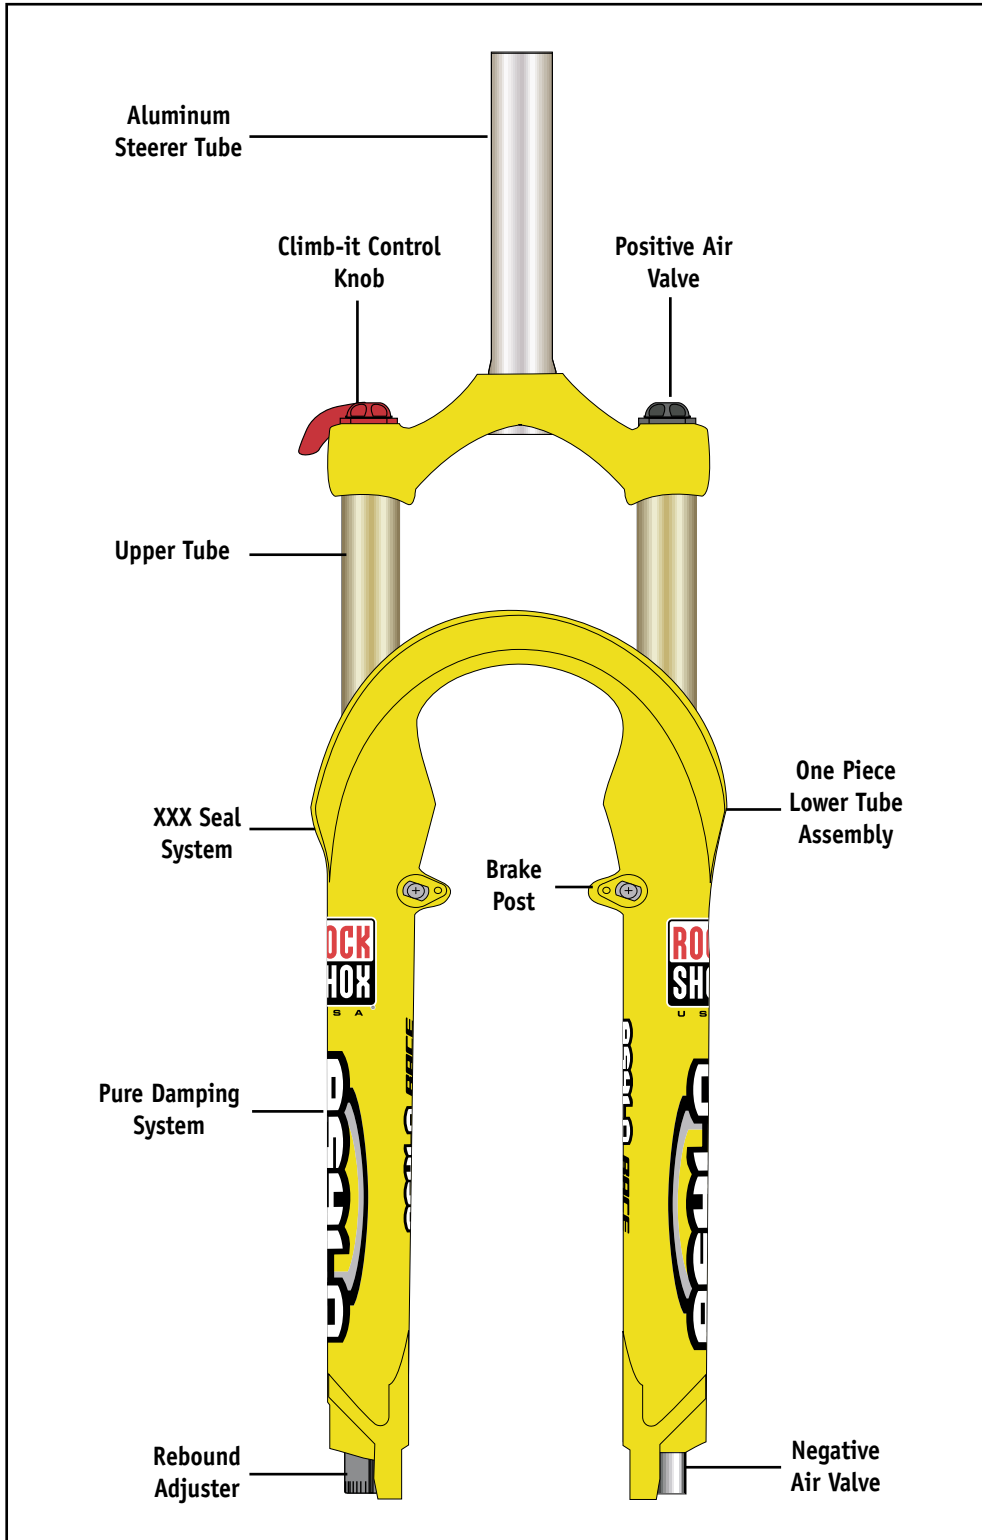

Note: Your fork's appearance may vary from the illustrations/photos in this manual.

* Denotes updated information since the printed version that came with your fork.

Congratulations! You have the best in suspension components on your bicycle! This manual contains important information about the safe operation and maintenance of your fork. To insure that your RockShox fork performs properly, we recommend that you have your fork installed by a qualified bicycle mechanic. We also urge you to follow our recommendations to help make your bicycling experience more enjoyable and trouble-free.

I M P O R T A N T

Consumer Safety Information

1. Before riding the bicycle, be sure the brakes are properly installed and adjusted. If the brakes do not work properly, the rider could suffer serious and/or fatal injuries.
2. If the fork ever loses oil or if it makes sounds of excessive topping out, stop riding the bicycle immediately and have the fork inspected by a dealer or call RockShox. Continuing to ride with the shock in these conditions could result in loss of control of the bicycle with possible serious and/or fatal injuries.
3. Always use genuine RockShox parts. Use of aftermarket replacement parts voids the warranty and could cause structural failure to the shock. Structural failure could result in loss of control of the bicycle with possible serious and/or fatal injuries.
4. Use extreme caution not to tilt the bicycle to either side when mounting the bicycle to a carrier by the fork drop-outs (front wheel removed). The fork legs may suffer structural damage if the bicycle is tilted while the drop-outs are in the carrier. Make sure the fork is securely fastened down with a quick release. Make sure the rear wheel is fastened down when using ANY bike carrier that secures the fork's drop-outs. Not securing the rear can allow the bike's mass to side-load the drop-outs, causing them to break or crack. If the bicycle tilts or falls out of its carrier, do not ride the bicycle until the fork is properly examined for possible damage. Return the fork to your dealer for inspection or call RockShox if there is any question of possible damage (See the International Distributor List). A fork leg or drop-out failure could result in loss of control of the bicycle with possible serious and/or fatal injuries.
5. Only mount cantilever-type brakes to the existing brake posts. Forks with hangerless style braces are only designed for 'V'- style or hydraulic cantilever brakes. Do not use any cantilever brake other than those intended by the brake manufacturer to work with a hangerless brace. Do not route the front brake cable and/or cable housing through the stem or any other mounts or cable stops. Do not use a front brake cable leverage device mounted to the brace.

ROCKSHOX FORKS ARE DESIGNED FOR COMPETITIVE OFF-ROAD RIDING AND DO NOT COME WITH THE PROPER REFLECTORS FOR ON-ROAD USE. YOUR DEALER SHOULD INSTALL PROPER REFLECTORS TO MEET THE CONSUMER PRODUCT SAFETY COMMISSION'S (CPSC) REQUIREMENTS FOR BICYCLE STANDARDS IF THE FORK IS GOING TO BE USED ON PUBLIC ROADS AT ANY TIME.

I N S T A L L A T I O N

It is extremely important that your RockShox fork is installed correctly by a qualified bicycle mechanic. Improperly installed forks are extremely dangerous and can result in severe and/or fatal injuries.

1. Remove the existing fork from the bicycle and the crown race from the fork. Measure the length of the fork steerer tube against the length of the RockShox steerer tube. The RockShox steerer tube may need cutting to the proper length. Make sure there is sufficient length to clamp the stem (refer to the stem manufacturer's instructions).

⚠ W A R N I N G

DO NOT ADD THREADS TO ROCKSHOX THREADLESS STEERERS. THE STEERER TUBE CROWN ASSEMBLY IS A ONE-TIME PRESS FIT. REPLACEMENT OF THE ASSEMBLY MUST BE DONE TO CHANGE THE LENGTH, DIAMETER OR HEADSET TYPE (THREADED OR THREADLESS).

DO NOT REMOVE OR REPLACE THE STEERER TUBE. THIS COULD RESULT IN THE LOSS OF CONTROL OF THE BICYCLE WITH POSSIBLE SERIOUS AND/OR FATAL INJURIES.

2. Install the headset crown race (26.4mm for 1" steerers, 29.9mm for 1 1/8" steerers) firmly against the top of the fork crown. Install the fork assembly on the bike. Adjust the headset until you feel no play or drag.
3. Install the brakes according to the manufacturer's instructions and adjust brake pads properly. Use the fork only with V-type or hydraulic cantilever brakes mounted to the existing brake posts or disc style brakes mounted through the provided mounting holes. Do not use any cantilever brake other than those intended by the brake manufacturer to work with a hangerless brace.
4. Adjust the front wheel quick release to clear the dropout's counter bore. The quick release nut must be tightened after the wheel is properly seated into the dropout's counter bore. Make sure four or more threads are engaged in the quick release nut when it is closed. Orient the quick release lever in front of and parallel to the lower tube in the locked position.
5. Keep in mind tire clearance as you choose tires. Maximum size is 2.6" wide or 347 mm radius installed. Be sure to check this radius whenever you change tires. To do this, remove the air and compress the fork completely to make sure at least 5mm of clearance exists between the top of the tire and the bottom of the crown. Exceeding maximum tire size will cause the tire to jam against the crown when the fork is fully compressed.

PERFORMANCE TUNING

RockShox Psylo forks can be tuned for your particular weight, riding style, and terrain.

Setting Sag

Psylo forks are designed to sag when you are sitting on your bike. Sag is the compression of the fork caused by the rider's weight. Proper sag allows the front wheel to follow the contour of the terrain as you ride. Sag is adjusted by increasing or decreasing the positive air pressure of your fork. Increasing the pressure in your positive chambers will decrease sag. Decreasing the pressure in your positive air chambers will increase sag.

Travel	Sag
80 mm	13-20 mm
100 mm	18-25 mm
125 mm	20-31 mm

To measure sag, install a zip tie on the upper tube of the fork flush against the XXX seal. Sit on the bike with normal riding apparel. Step off the bike, and measure the distance between the XXX seal and the zip tie. This is your sag.

Air Pressure Guidelines

Use the table below to assist with positive air pressure. Always tune positive air pressure first, based on the desired sag.

Rider Weight	Positive Air Pressure
>120lb (55 kg)	70-80 psi
120-140lb (55-65 kg)	80-100 psi
140-160lb (65-73 kg)	100-120 psi
160-180lb (73-82 kg)	120-140 psi
>180lb (82 kg)	140-160 psi

Adjusting your forks negative air chamber pressure will change its ride characteristic. More negative air pressure will make the fork more active over small bumps. Less negative air pressure will reduce bobbing. Always tune positive air pressure first, then adjust negative air pressure.

Rider Weight	Negative Air Pressure	
	XC	Racing
>120lb (55 kg)	70-80 psi	40-60 psi
120-140lb (55-65 kg)	80-100 psi	60-80 psi
140-160lb (65-73 kg)	100-120 psi	80-100 psi
160-180lb (73-82 kg)	120-140 psi	100-120 psi
>180lb (82 kg)	140-160 psi	120-140 psi

External Rebound Adjustment

To change the rebound damping on your Psylo, locate the adjuster knob on the lower right leg. A clockwise adjustment will increase the rebound damping; a counterclockwise adjustment will decrease the rebound damping. Small changes in knob position will make large changes on the trail. Start in the middle, and increase or decrease as necessary.

Climb-It Control

To change the compression damping adjustment on your Psylo, locate the red adjuster knob on top of the right leg. A clockwise adjustment will increase the compression damping. Turning the adjuster completely clockwise will provide "On-The-Fly Lockout" to minimize movement while sprinting or climbing. Incorporated into the Lockout system is a big hit blow-off feature, allowing for fork movement in the event of an unsuspected change in terrain.

MAINTENANCE

To maintain the high performance, safety, and long life of your fork, periodic maintenance is required. If you ride in extreme conditions, maintenance should be performed more frequently.

Before Every Ride

Check the other components on your bicycle in accordance with the manuals supplied by the manufacturer to make sure they are in working order.

After Every Ride

Clean and dry the exterior of your fork. Avoid directing water pressure at the upper tube/XXX seal junction.

Every 25 Hours of Riding

- Using a small blade screwdriver, carefully push the XXX seal up from the lower tubes. Saturate the foam wiper with RockShox RedRum. Refit wiper in lower tube.

NOTE: TO PREVENT SCRATCHING THE UPPER TUBES, COVER THE SCREWDRIVER TIP WITH A SOFT CLOTH. CAREFULLY LIFT THE FOAM LUBRICATION RING. ENSURE THAT THE FOAM RING IS CLEAN AND FREE OF DEBRIS.

- Check top cap assemblies, brake post bolts, and shaft bolts for proper torque.

Torque Tightening Values

Top Cap	60 in-lb
Brake Posts	80 in-lb
Air Shaft Nut	50 in-lb
Damper Shaft Bolt	50 in-lb

Every 50 Hours of Riding

NOTE: SERVICE ON YOUR PSYLO CAN BE PERFORMED WITH IT STILL INSTALLED ON YOUR BICYCLE. YOU WILL NEED TO DISCONNECT THE FRONT BRAKE CABLE AND REMOVE THE WHEEL.

Tools Required

- 5mm Hex Wrench
- Plastic Face Mallet
- Safety Glasses
- Small, Flat Blade Screwdriver
- 10mm Socket
- Torque Wrench
- 24mm 6-point Socket
- RockShox RedRum
- RockShox 5 wt. oil*
- Internal Snap Ring Pliers

PART I: REMOVE AIR PRESSURE (FIGS. 1-2)

- Remove negative air valve cover. Depress schrader valve to remove negative air pressure.
- Remove positive air valve cover. Depress schrader valve to remove positive air pressure.
- Using a 24mm socket, remove left top cap.

PART II: REMOVE LOWER TUBE ASSEMBLY (FIGS. 3-5)

- Using a small blade screwdriver, carefully push the XXX seal up from the lower tubes.
- To prevent scratching the upper tubes, cover the screwdriver tip with a soft cloth. Carefully lift the foam lubrication ring. Insure that the foam ring is clean and free of debris. Leave each on the upper tube.
- Gently pull downward to remove rebound adjuster
- Loosen damper shaft bolt 5 turns and tap firmly with a plastic faced mallet to separate the shaft from the lower tubes.
- Loosen air shaft nut and unthread to the end of the negative air shaft. Tap firmly with a plastic faced mallet to separate the shaft from the lower tube.
- Keep a bucket nearby to catch oil. Inspect the condition of removed oil.
- Remove damper shaft bolt and Dual Air shaft nut.
- Carefully slide lower tube assembly off of upper tubes.



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

PART III: CLEAN LOWER TUBE ASSEMBLY

12. Use a biodegradable solvent (Simple Green, Pedro's, or equivalent) and a 12" long, 1 1/4" diameter soft bristle bottle brush to clean the lower tube internals. Dry thoroughly.

PART IV: REMOVE DUAL AIR ASSEMBLY (FIG. 6)

WARNING

ENSURE ALL AIR IS REMOVED FROM THE FORK. REMOVING THE DUAL AIR ASSEMBLY WHILE THE FORK STILL CONTAINS AIR MAY CAUSE SERIOUS BODILY INJURY.

13. Using internal snap ring pliers, remove the Dual Air assembly retaining ring.
14. Slide the Dual Air assembly from the upper tube.

PART V: ALL TRAVEL SYSTEM (FIGS. 7-9)

RockShox Psylo forks can be configured for 80, 100, or 125 mm of travel. To change the travel, either install or remove the All Travel Spacer(s) between the air piston and the top out washer on the negative air shaft. 80 mm travel requires the use of the 25 and 20 mm All Travel spacers, 100 mm travel requires the installation of the 25 mm All Travel spacer. To obtain 125 mm of travel, do not use any All Travel spacers.

PART VI: INSTALL DUAL AIR ASSEMBLY (FIGS. 10-11)

15. Using RockShox Redrum, thoroughly lubricate the air piston o-ring.
16. Slide the air piston assembly into the Dual Air tube.
17. Slide the Dual Air assembly into the upper tube (left leg, rider's perspective) until it stops.
18. Re-install the Dual Air assembly retaining ring.

PART VII: INSTALL LOWER TUBE ASSEMBLY

19. Pour 5 cc Redrum on top of the air piston. (left side, rider's perspective)
20. Install top cap and torque to 60 in-lbs.
21. Carefully engage lower tubes onto the upper tubes.
22. Slide lower tube assembly onto the upper tubes until just before the lower bushing engages with the upper tube.

PART VIII: REFILL FLUIDS (FIG. 12)

23. Pour 10cc of RockShox 5 wt.* into each leg.
24. Slide the lower legs onto the upper tubes until they engage with the damper and Dual Air shafts.
25. Install the damper shaft bolt (right leg) and Dual Air shaft nut (left side). Torque to 60 in-lbs.
26. Re-install rebound adjuster.
27. Install foam ring and XXX seal, pressing the XXX seal flush with the lower leg assembly. A small cable tie inserted between the upper tube and the seal will help eliminate air build-up behind the seal on installation. Remove cable tie following seal installation.
28. Repressurize the fork according to your weight and desired ride characteristic.

NOTE: ALWAYS INFLATE THE POSITIVE AIR CHAMBER FIRST.




Fig. 6




Fig. 7 (80 mm)




Fig. 8 (100 mm)




Fig. 9 (125 mm)




Fig. 10




Fig. 11



Fig. 12

PURE DAMPING SYSTEM

Your fork uses a Pure Damping System. With the red Climb-It control lever turned completely clockwise, only a minimal amount of fork movement should be felt. While standing astride the bicycle, press down on the handlebars quickly. A maximum of 6 mm fork movement should be obtainable. Remember, your fork has a blow-off feature for big hits. Some riders may be able to activate the blow-off and achieve more than 6 mm of travel.

When checking the lockout, light to medium pressure on the handlebars best simulates real world riding conditions.

To maintain Lockout control and damping quality, the Pure Damping system should be rebuilt once a year. Only a qualified bicycle mechanic with proper tools should perform a rebuild of the Pure Damping System.

For more detailed service information, contact your local RockShox dealer or visit www.rockshox.com.

WARRANTY

RockShox, Inc. warrants its products for a period of one year from original date of purchase to be free from defects in materials or workmanship. Any RockShox product that is returned to the factory and is found by RockShox to be defective in materials or workmanship will be repaired or replaced at the option of RockShox, Inc. This warranty is the sole and exclusive remedy. RockShox shall not be held liable for any indirect, special, or consequential damages.

The warranty does not apply to products which have not been properly installed and adjusted according to RockShox installation instructions. The warranty does not cover any product that has been subject to misuse or whose serial number has been altered, defaced or removed. This warranty does not cover paint damage or modifications to the product. Proof of purchase is required.

Warranty Repair

If for any reason it should be necessary to have warranty work done, return the product to the place of purchase. In the USA, Dealers should call for a Return Authorization number (RA#) prior to returning product.

Products returned for inspection must be sent freight prepaid and with proof of purchase to:

RockShox, Inc.
1610 Garden of the Gods
Colorado Springs, CO 80907

For more technical information, visit our website at www.rockshox.com. For toll-free technical support in the USA, call 1.800.677.7177. Customers in countries other than the USA should contact their local dealer or distributor.

INTERNATIONAL DISTRIBUTOR LIST

Argentina

Broni S.A.
Phone: 54 11 4292 3000
FAX: 54 11 4292 4453
J.J. PASO 1260, (1832) LOMAS DE ZAMORA,
BUENOS AIRES

Australia

Steve Cramer Products
Phone: 61 3 9587 1466
FAX: 61 3 9587 2018
39 INDUSTRIAL DRIVE BRAESIDE, VICTORIA 3192

Austria

Barisitz-Austria
Phone: 43 512 39 22 87
FAX: 43 512 39 45 19
BERNHARD-HOEFELSTRASSE 14, A-6020, INNSBRUCK

Belgium

Vertex Cycle Systems BV
Phone: 31 23 57 18184
FAX: 31 23 57 18606
FLEMINGSTRAAT 100A, 2041 VL ZANDVOORT
HOLLAND

Canada

Bell Sports Canada
Phone: 403 273 1427 (Calgary)
FAX: 403 248 1221
BAY 147, 2760 45TH AVE SE
CALGARY, ALBERTA
T2B 3M1

Chile

Bicicletas Belda Limitada
Phone: 56 32 881799
FAX: 56 32 978799
14 NORTE 1001
VINA DEL MAR

Colombia

Disandina Ltda.
Phone: 574-288-8322
FAX: 574-288-6211
CIUDADELA INDUSTRIAL, SIERRA MORENA BODEGA
No. 207, CRA. 43 A No. 61 SIR 152, SABANETA

Costa Rica

Inversiones Y Sistemas Garvi
Phone: 506 296 3383
FAX: 506 289 7013
P.O. BOX 4805-1000, SAN JOSE

Czech Republic

Vanek Praha
Phone: 42 0 312 698 1889
FAX: 42 0 312 698 025
CERRENY UJEZD 185, UNHOST, 27351

Denmark

Duell A/S
Phone: 45 86 36 7800
FAX: 45 86 36 7377
MOLLERUPVEJ 3, TAASTRUP, 8410 RONDE

Ecuador

Bici Sport
Phone: 5932 248737
FAX: 5932 253691
AV DE DICIEMBRE 6327, ENTRE LOUVRE Y TOMAS DE,
BERLANGA.LOCAL #3, QUITO

Estonia

Hawaii Express
Phone: 372 6 398 508
FAX: 372 6 398 566
REGATI 1, 5K-102, TALLINN, 11911, Estonia
Or
Estonian Unidream
Phone: 372 636 7470
Fax: 372 636 7470
Paavli 2A, Tallinn
EE0004, Estonia

Finland

Mr. Cool OY
Phone: 358 9 3250817
FAX: 358 9 3250609
LINNAVOURENTIE 28, HELSINKI, 00950

France

Royal Velo France
Phone: 33 325 433 730
Fax: 33 325 43 95 95
4 RUE DES AZALEES, P.A. SUD-CHAMPANGE
ST THIBAUT, 10800

Germany

Sport Import GmbH
Phone: 49 44 05 9280 0
FAX: 49 44 05 9280 49
INDUSTRIESTRASSE 41 B, EDEWECHT, 26188

Greece

Gatsoulis Stefanos Imports
Phone: 30 12512 779
FAX: 30 12533 960
8 THESSALONIKIS STREET, NEW FILADELFIA,
ATHENS, T.T. 14342

Guatemala

BYS Importaciones S.A.
Phone: 502 366 7709
FAX: 502 363 3918
18 CALLE 7-48, ZONA 10, GUATEMALA

Holland

Vertex Cycle Systems BV
Phone: 31 23 57 18184
FAX: 31 23 57 18606
FLEMINGSTRAAT 100A, 2041 VL ZANDVOORT
HOLLAND

Hong Kong

Flying Ball Bicycle Company
Phone: 852 23813661
FAX: 852 23974406
201 TUNG CHOI ST. G/F, MONGKOK KOWLOON

Hungary

Prokero Ltd Co.
Phone: 361 331 3184
FAX: 361 331 3184
KALMAN IMRE UTCA 23, BUDAPEST, 1054

Iceland

Orninn Hjol Ltd
Phone: 354 588 9892
FAX: 354 588 9896
SKEIFAN 11, P.O. BOX 8036, REYKJAVIK

Ireland

Madison
Phone: 44 181 385 3385
Fax: 44 208 345 3443
BUCKINGHAME HOUSE EAST, THE BROADWAY
STANMORE, MIDDLESEX HA7 4EA
UNITED KINGDOM

Israel

S.I. Noam
Phone: 972 3659 7928
Fax: 972 3659 7928
4 HA'ATZMAUT AVE,
BAT-YAM, ISRAEL
59441

Italy

Motorquality
Phone: 39 02 24 951 1
FAX: 39 02 24 951 228
20099 SESTO S. GIOVANNI, (MI) I VIA VENEZIA,
(ANG. VIA CARDUCCI), MILANO

Japan

Yoshigai Corporation
Phone: 81 729 88 5461
FAX: 81 729 88 5463
5-19, 1-CHOME, SHIMOROKUMANGI-CHO, HIGASHI-
OSAKA JAPAN 579

Korea

KS Sports
Phone: 822 548 5408
FAX: 822 512 3230
SHIN SEUNG BLDG 4TH FLR, 115-4 NONHYUN-DONG,
KANGNAM-KU, SEOUL

Latvia

Veloserviss
Phone: 371 750 1292
Fax: 371 750 1298
1/1 HAPSALAS ST., RIGA, LV-1005

Luxembourg

Vertex Cycle Systems BV
Phone: 31 23 57 18184
FAX: 31 23 57 18606
FLEMINGSTRAAT 100A, 2041 VL ZANDVOORT
HOLLAND

Mexico

Tekno Bike
Phone: 52 8 336 5602
FAX: 52 8 338 5663
HUMBERTO LOBO #780, COL. DEL VALLE, GARZA
GARCIA, MEXICO, CP, 66220, Mexico

New Zealand

W.H. Whorrall & Co. Ltd.
Phone: 64 9 63 6 06 41
FAX: 64 9 63 6 06 31
43 FELIX ST
PENROSE, AUCKLAND
NEW ZEALAND

Norway

Hallman Sports
Phone: 46 18 56 16 00
FAX: 46 18 50 03 22
HALLNASGATAN 8, S-75228 UPPSALA, SWEDEN

Panama

Distribuidora Rali S.A.
Phone: 507 220-3844
FAX: 507 220-5303
VIA ESPANS EDIFICA CARCEP, P.O. BOX 87-0852,
PANAMA 7

Peru

Rojo Sports
Phone: 511 447 0838
FAX: 511 447 0838
AV. REPUBLICA DE, PANAMA 6513, LIMA 33

Poland

Giant Polska S.P. ZOO
Phone: 48 22 645 14 34
FAX: 48 22 645 14 36
AL NIEPODLEGLOSCI 221-4, 02-087 WARSZAWA

Portugal

Bicimax
Phone: 351 44 553276
FAX: 351 44 553187
APARTADO 34, 2431 MARINHA GRANDE

Russia

Sportex
Phone: 7095 288 4524
FAX: 7095 288 6888
KUDRINSKAYA PL., 1,, P.O.BOX 33, MOSCOW,
123242

St. Maarten

Tri-Sport International
Phone: 5995 43462
FAX: 5995 43928
8 AIRPORT BOULEVARD, SIMPSON BAY, NAMIBIA

Singapore

Treknology Bikes 3
Phone: 65 466 2673
FAX: 65 466 7610
24 HOLLAND GROVE ROAD, SINGAPORE, 1545

Slovak Republic

Paul Lange Oslany
Phone: 42 1 862 5492 344
FAX: 42 1 862 5492 350
MIEROVA 854/37 OSLANY, 97247 SLOVAKIA

Slovenia

Proloco Trade
Phone: 386 64 380 200
FAX: 386 64 380 2022
ENOTA KRANJ, BRITOF 96A, 4000 KRANJ

South Africa

Coolheat (SA) (PTY) Ltd.
Phone: 27 11 807 5282
FAX: 27 11 807 2998
3 RUARGH STREET, PARK CENTRAL, P O BOX 740,
JOHANNESBURG 2001

Spain

K. Motor Dealer S.L.
Phone: 34 9 1 637 70 97
FAX: 34 9 1 637 72 64
PARQUE INDUSTRIAL, EUROPOLIS EDIFICO BRUSELA,
BLOQUE 4, NAVE 1, LAS ROZAS (MADRID), N/A,
28230

Sweden

Hallman Sports
Phone: 46 18 56 16 00
FAX: 46 18 50 03 22
HALLNASGATAN 8, S-75228 UPPSALA

Switzerland

Cilo Bike Service SA
Phone: 41 21 641 63 30
FAX: 41 21 641 63 82
CH. DE L'ORIO 30 A, CASE POSTALE 64, CH- 1032
ROMANEL S. LAUSANNE

Taiwan

Biketech Co. Ltd.
Phone: 886 22 694 5806
FAX: 886 22 694 6133
NO. 12 FU TEH ROAD, 266 LANE, 37 ALLEY HSICHIH,
TAIPEI HSIEN, TAIWAN, R.O.C.

Thailand

Probike Co. Ltd.
Phone: 662 254 1077
FAX: 662 254 1078
237/2 SARASIN ROAD, LUMPINNE, PATUMWAN,
BANGKOK, 10330

Turkey

EBSAT
Phone: 90 212 514 0525
FAX: 90 212 519 4846
EBSAT EMEK BISIKLET, EBUSSUUD CAD NO.67, 34410
SIRKECI, ISTANBUL, 34410

United Kingdom

Madison
Phone: 44 181 385 3385
Fax: 44 208 345 3443
BUCKINGHAME HOUSE EAST, THE BROADWAY
STANMORE, MIDDLESEX HA7 4EA
UNITED KINGDOM

Uruguay

International Sports
Phone: 5982 782498
FAX: 5982 622532
AVDA. BRASIL 2567, 11800 MONTEVIDEO

Venezuela

Bike Sports
Phone: 582 751 9709
FAX: 582 753 5071
CENTRO COMERCIAL IBARRA, PLANTA BAJA, LOCAL
3-A CALLE GARCILAZO, COLINAS DE BELLO, O,
CARACAS